



FX-350 - Data Sheet

TL3 Compliant Guardrail Barrier

Specification

- NCHRP 350 Test Level 3 (TL3) Compliant
- Compliant to AS/NZS 3845:1999
- Specially engineered O-Posts
- 200mm offset blocking pieces
- No stiffeners required
- Height of rail above ground line – 710mm
- ET2000 compatible for a fully compliant TL3 system
- Ingal Melt & Trailing Terminal Compatible
- Exclusive to Ingal Civil Products




O-Post Features

- Easy to handle; roll-formed shape provides handle-like grip, with no sharp edges
- 20% lighter in weight than a standard steel guardrail post
- Crash tested for bi-directional vehicle impacts
- Ribs and rolled edges add section strength and increases driveability
- Retains its shape when driving through gravel, road base or asphalt.

FX-350 Application Benefits

- Fully compliant to NCHRP 350 TL3
- Designed for direct attachment to the ET2000 Terminal and Ingal Melt Terminals
- O-Posts replace traditional 'deemed to comply' C posts
- No stiffener facilitates quicker installation
- 20% more posts per truck load
- Low deflection provides increased motorist protection against hazards located close to roadways.

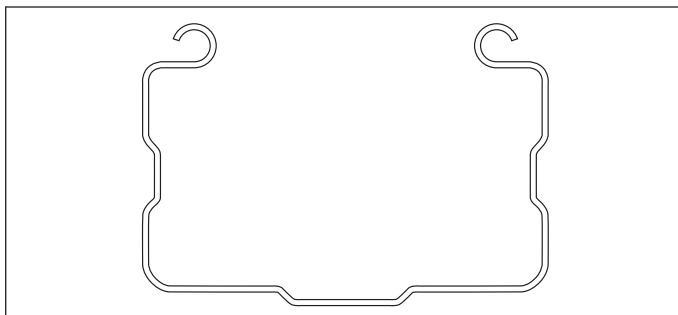

O-Post cross section