




# MELT with SYT Posts - Data Sheet

## Guardrail End Treatment

### Specification

- Compliant to AS/NZS 3845:1999
- Exclusive to Ingal Civil Products
- Approved for use in NSW, SA and Qld
- Flared gating terminal
- Terminal length – 8m
- Nokout's at post 1 & 2 - NSW & SA
- Slip base plates at posts 1 & 2 - QLD
- Steel Yielding Terminal Posts (SYTP) at post locations 2 to 6
- Supplied with Ingal blocking pieces

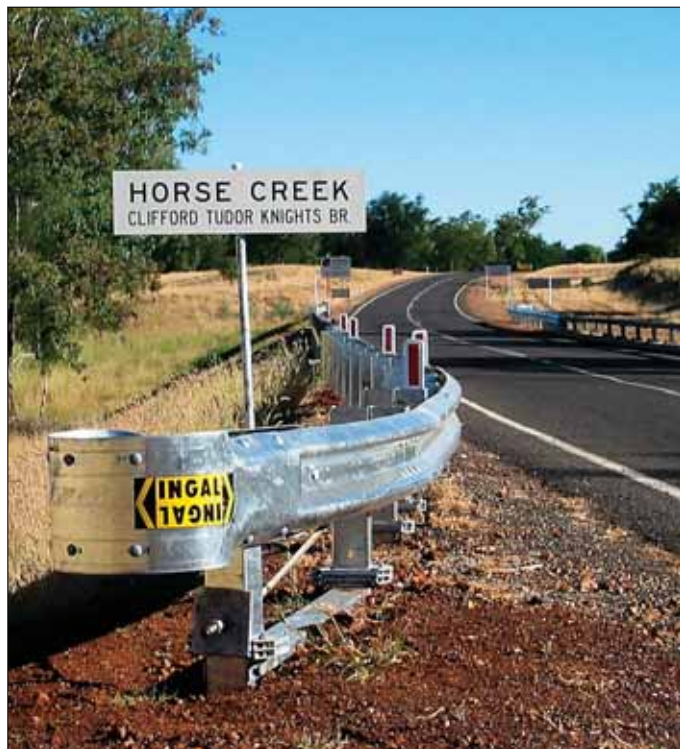

### SYTP Features

- NCHRP 350 Test Level 3 compliant
- Interchangeable with ET2000 Plus end terminal, reducing product inventory
- Specially engineered yielding action minimises debris often encountered with timber or two-piece post systems.
- Posts can be driven directly into the ground
- Single piece construction reduces installation time

### Ingal Block Features

- Maintains geometry during impact
- Self hanging fingers eliminate the requirements for 2 block bolts
- Click-in delineator receptor
- 1/3rd the weight of traditional steel blocking pieces