





# Isolator - Data Sheet

**NCHRP350 COMPLIANT**

*Improving Workzone Safety*

## Specification

- NCHRP 350 Test Level 3 (TL3) compliant (2,270kg pick-up travelling at 100 km/h and 25 degrees)
- Australian Standard 3845 Compliant
- Standard length of 4m and 6m
- Identical ends – no pins, connection plates or bolts required
- Vertical lift to install and remove
- 2270kg pick - up test deflection – 1.5m
- 2000kg pick - up calculated deflection – 1.3m
- Height of barrier – 810mm
- Width of barrier – 610mm
- Can be field curved to 32m radius and 49m radius for 4m and 6m units respectively

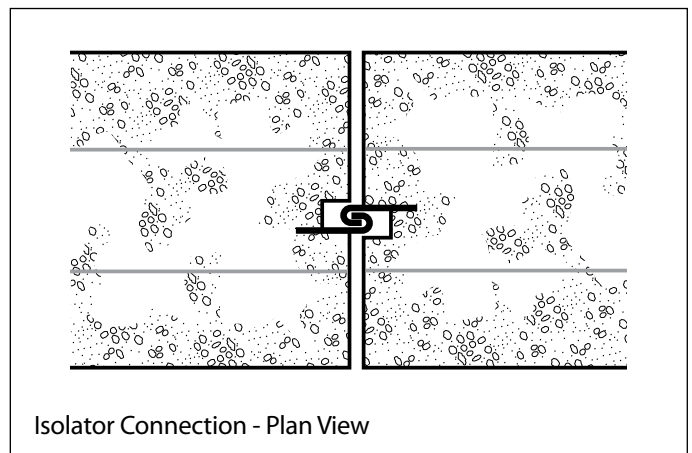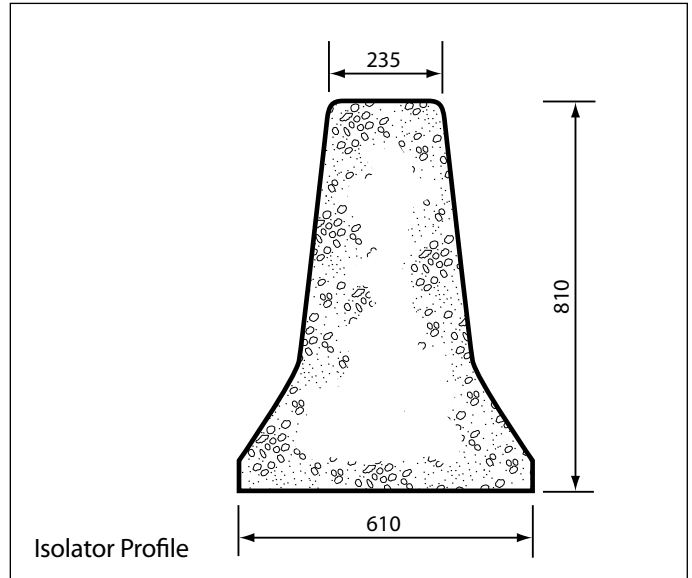

## Application Benefits

- Rapid installation
- Low cost to install
- No connection hardware
- No requirement to rotate barriers to match ends
- Intermediate barriers can be removed without interfering with adjacent units